



FIG. 1

25

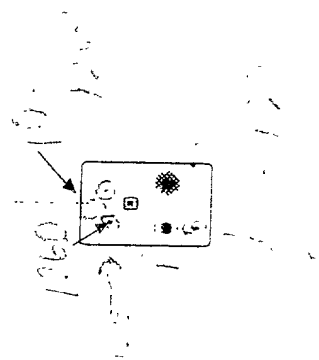

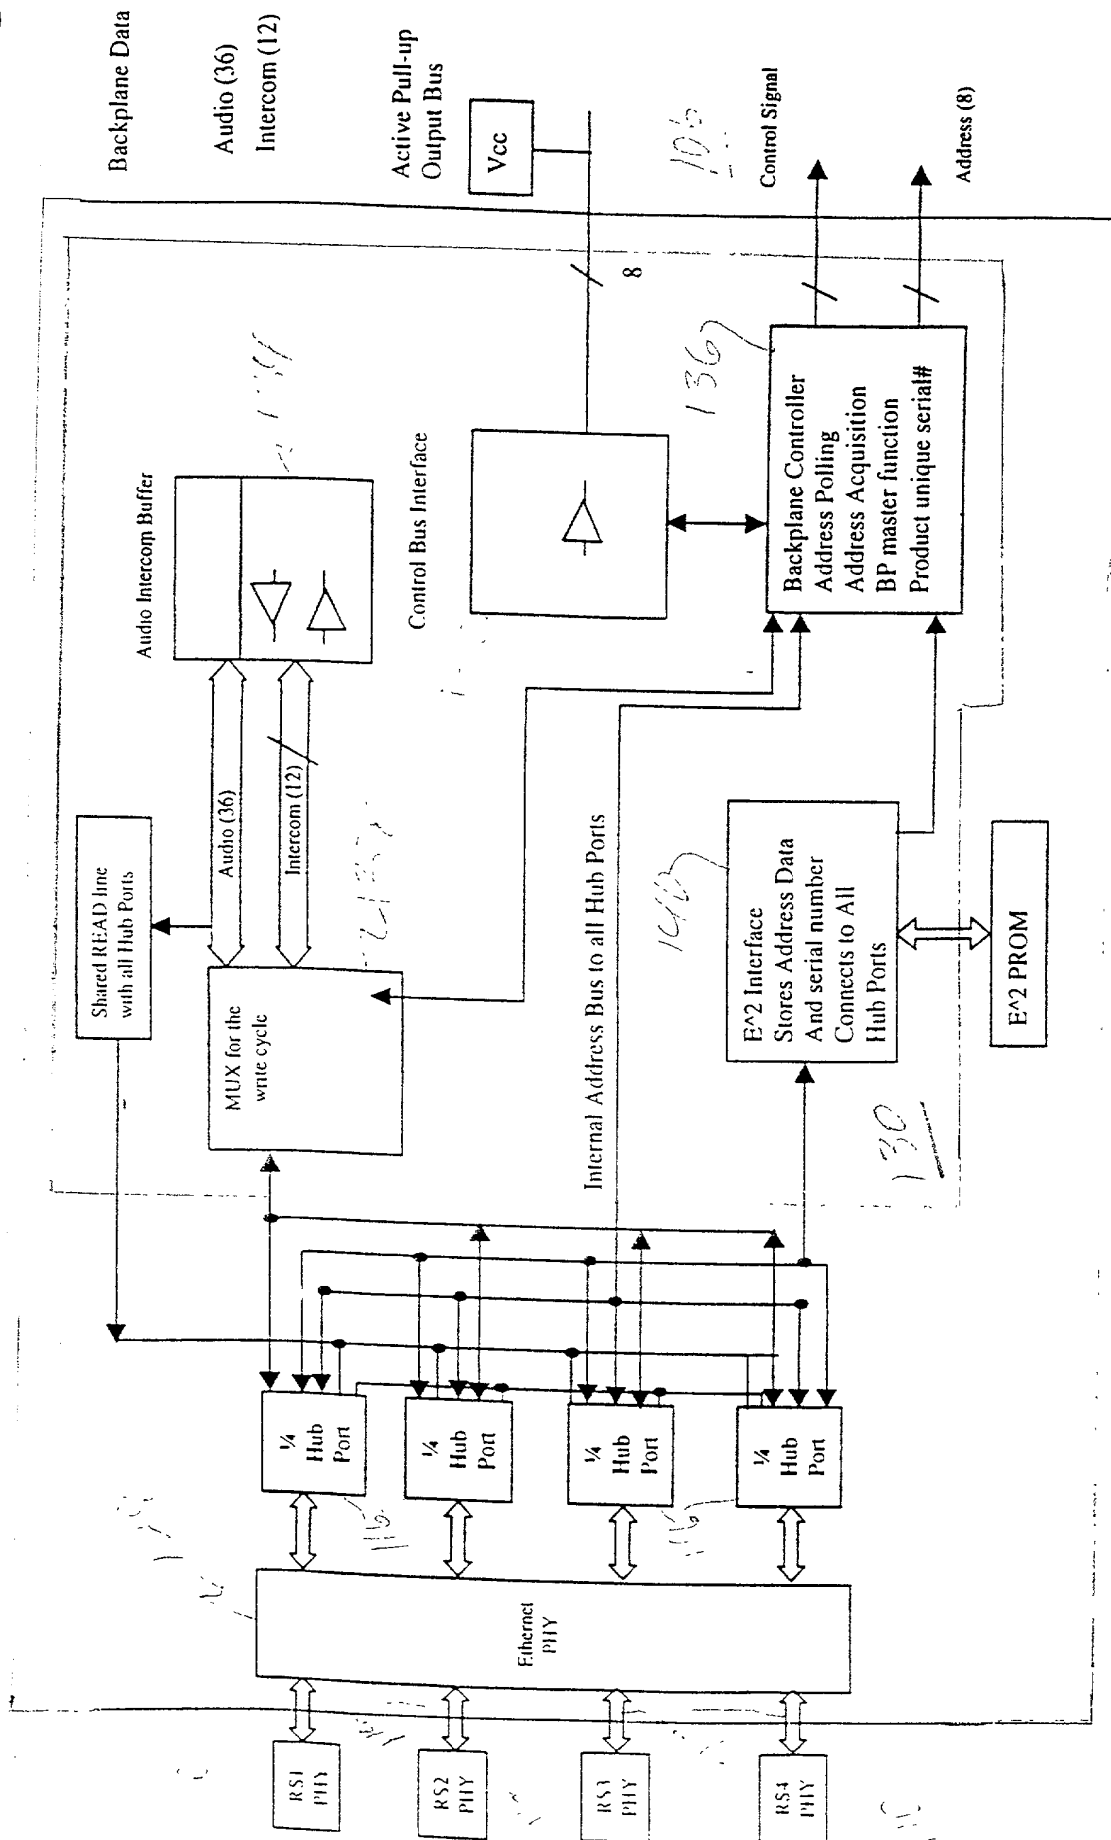

# Network Timing Overview

## Frame N (backplane reference)

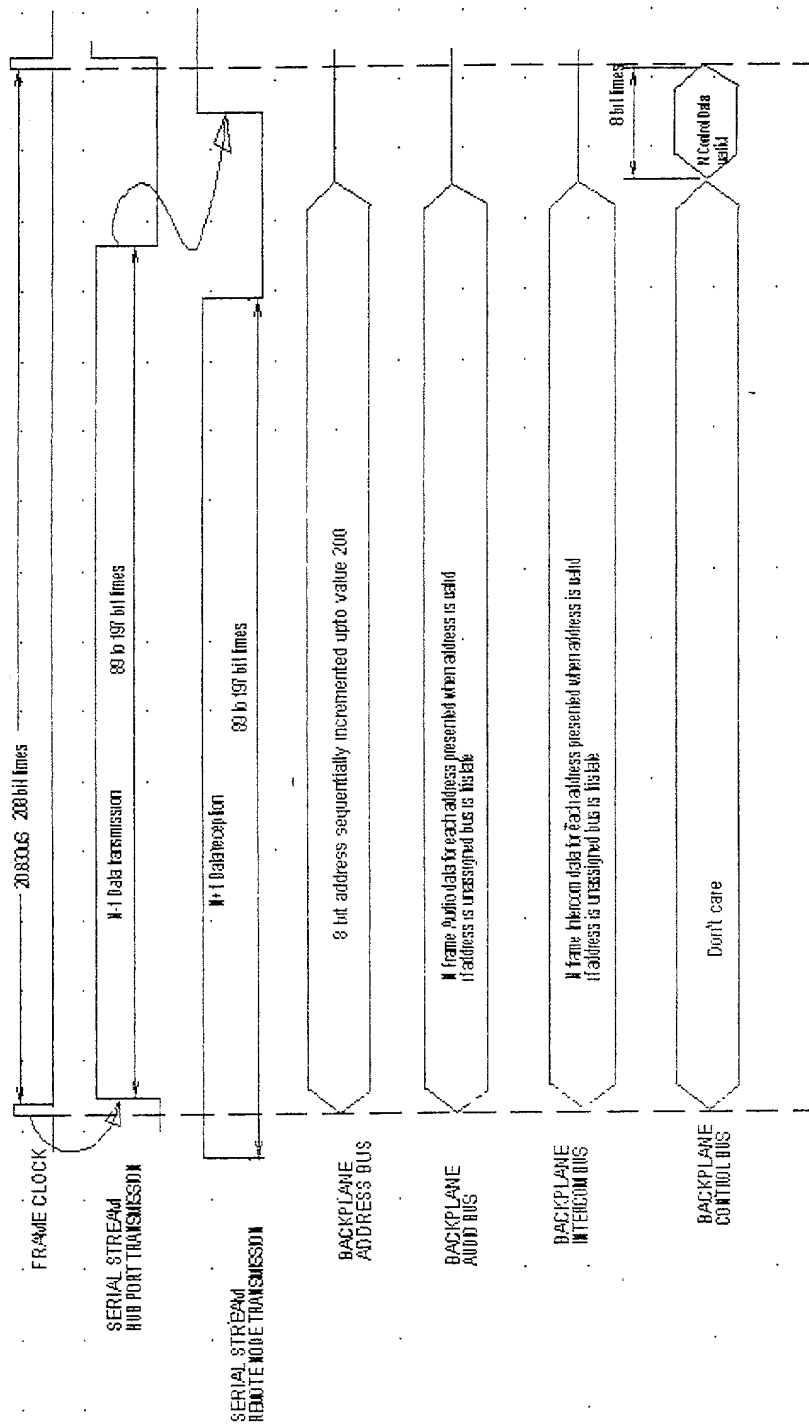


Fig. 4A

Preamble	CBS	Hub control	Data	Icom	Left audio 1	Right audio 1	Left audio 2	Right audio 2	Left audio 3	Right audio 3	Left audio 4	Right audio 4
AAAAABh	cbs	HC7.. HC0	D7 .. D0	I11... I0	A1L17... A1L0	A1R17... A1R0	A12L17.. A2L0	A2R17.. A2R0	A3L17.. A3L0	A3R17.. A3R0	A4L17... A4L0	A4R17.. A4R0

Fig. 4B

# Initialization Process Timing

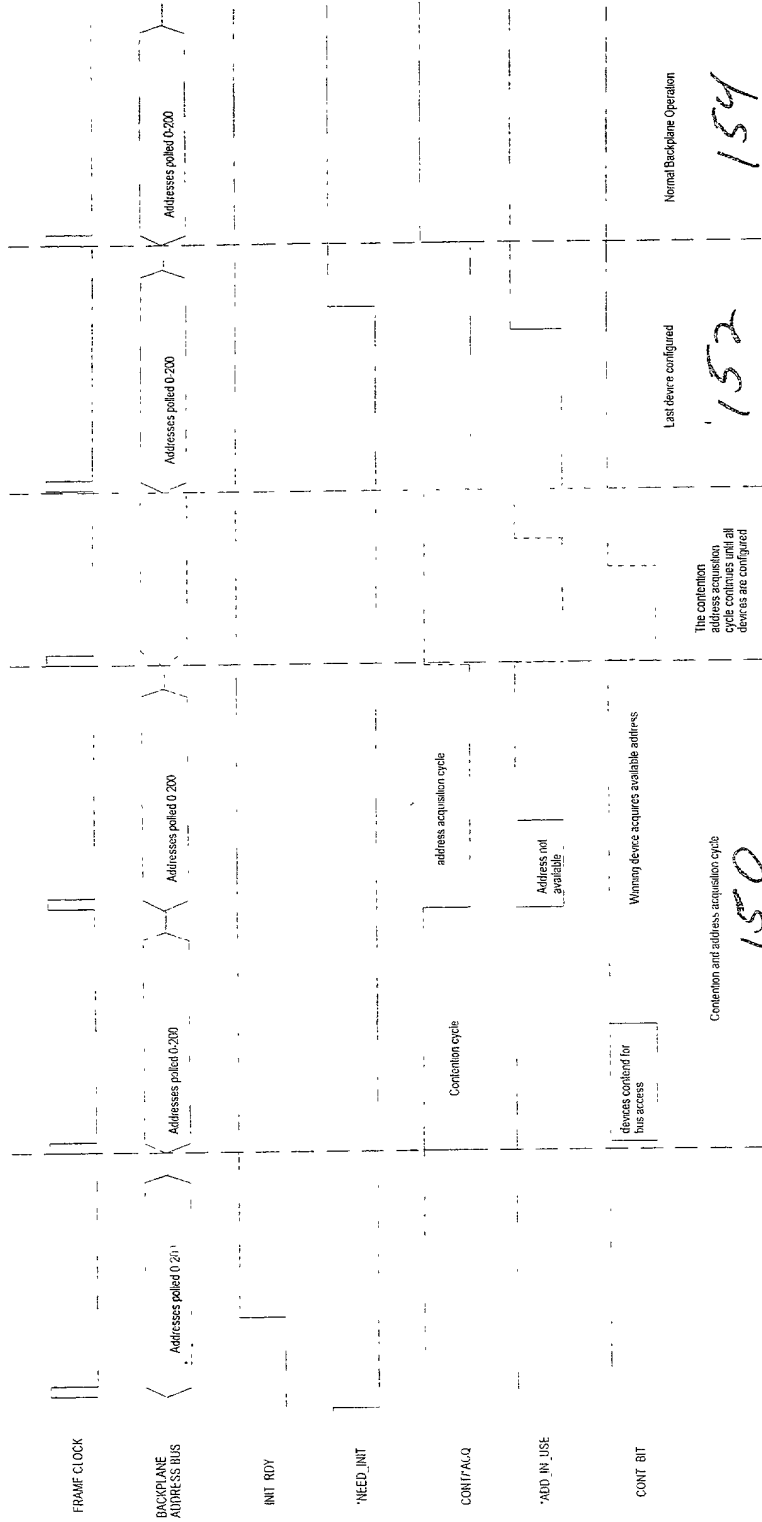


Fig. 5

TC4050-16964350  
Mediatoo Initialization Process

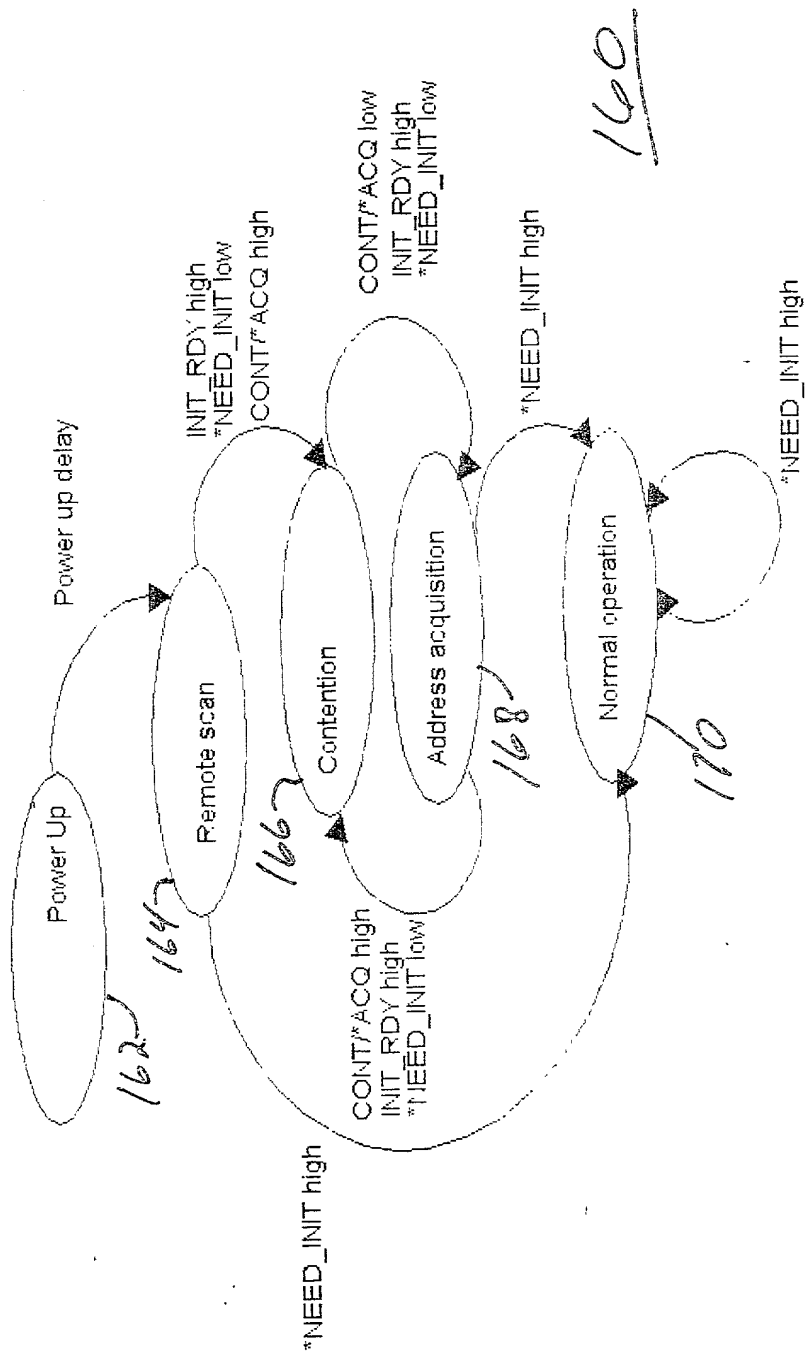


Fig. 6

### Control message transmission

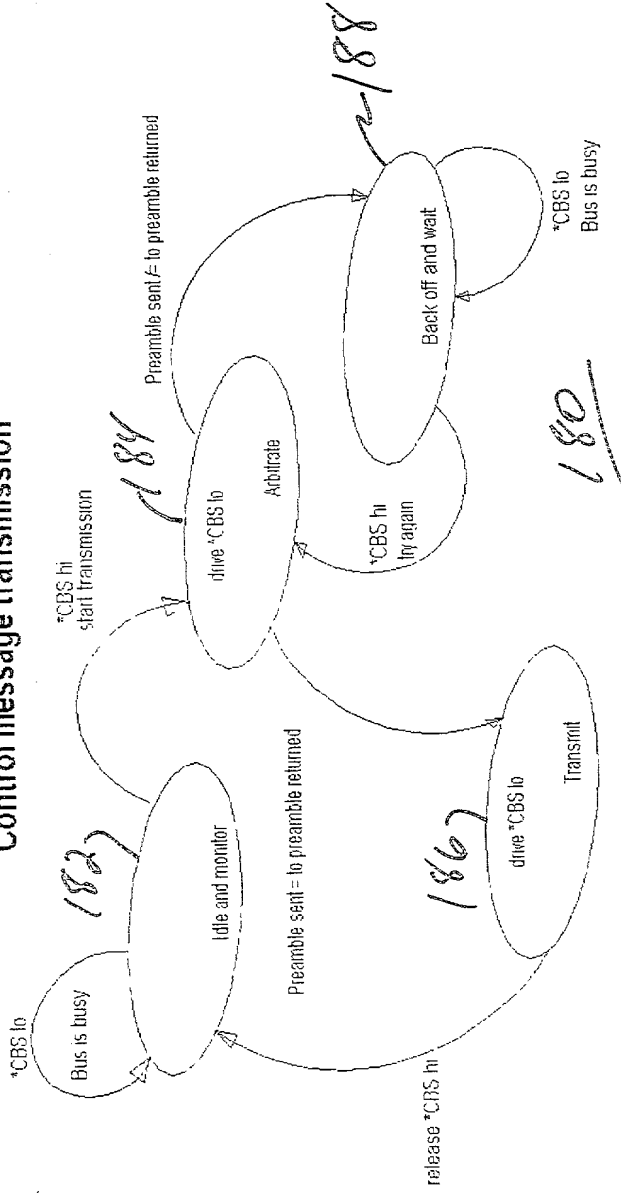


Fig. 7A

Preamble	Destination address	Source address	Number of Bytes in Payload	Payload	Checksum
10 bytes	1 byte	1 byte	2 bytes	0-65Kbytes	2 bytes

Fig. 7B

# Control message reception

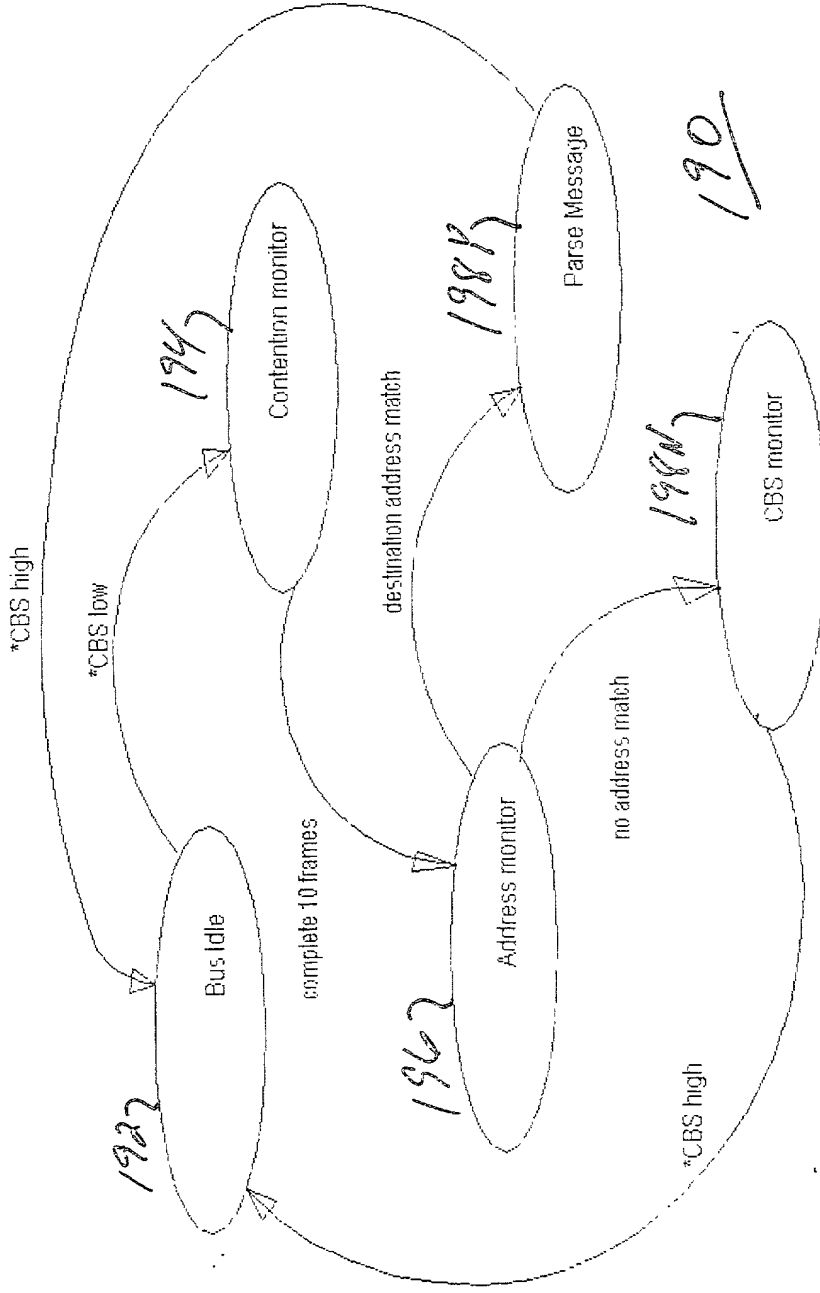


Fig. 8



## Amplified Room Keypads

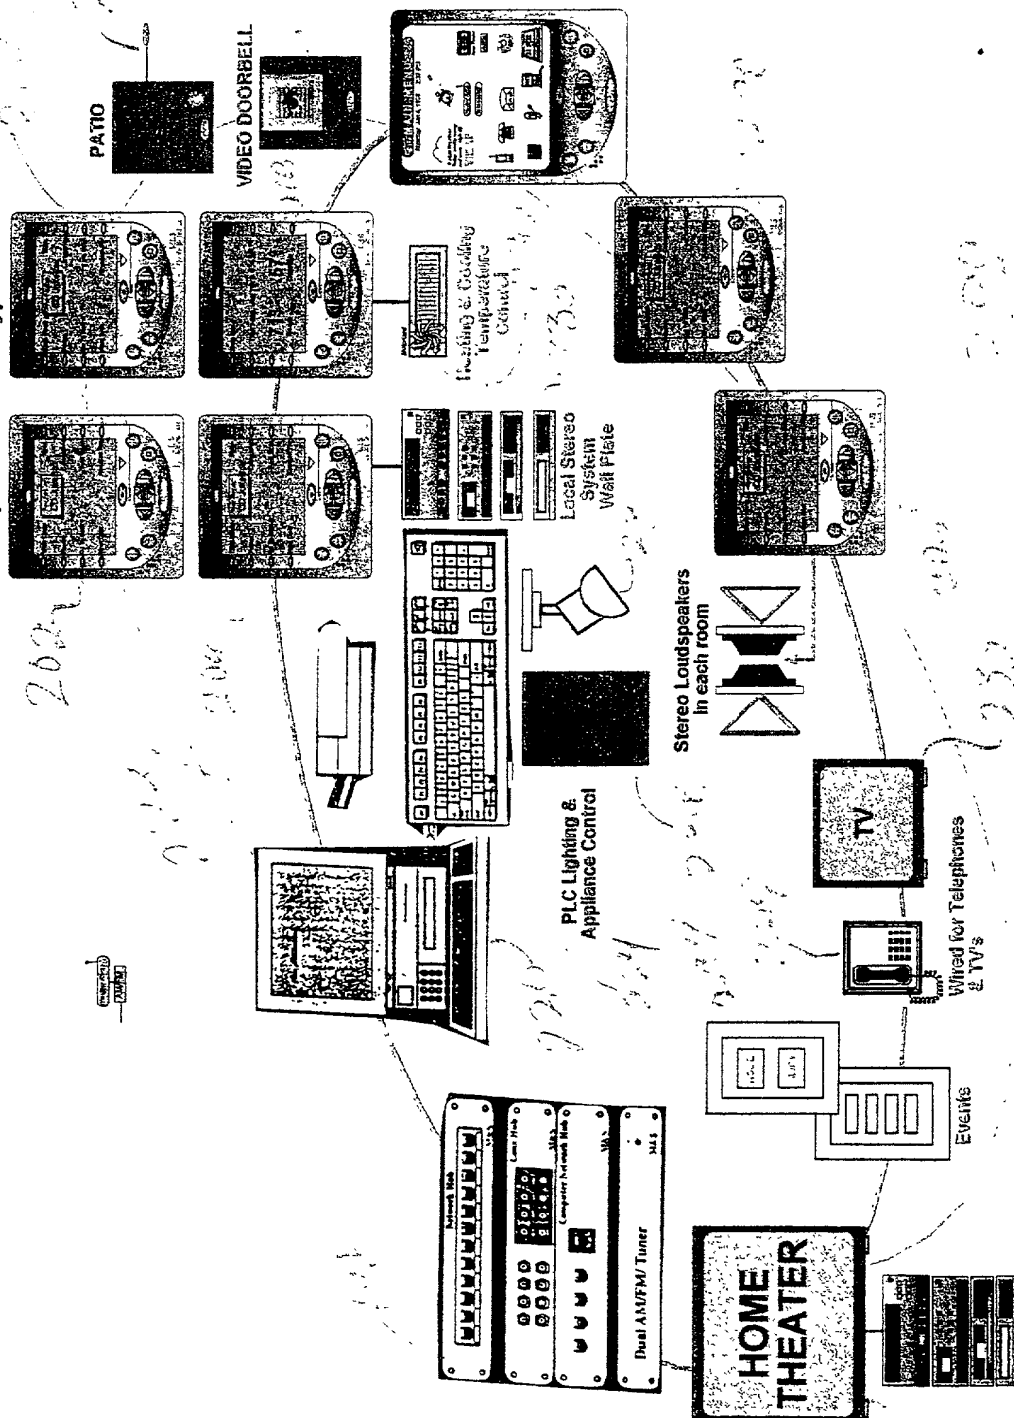


Fig. 10

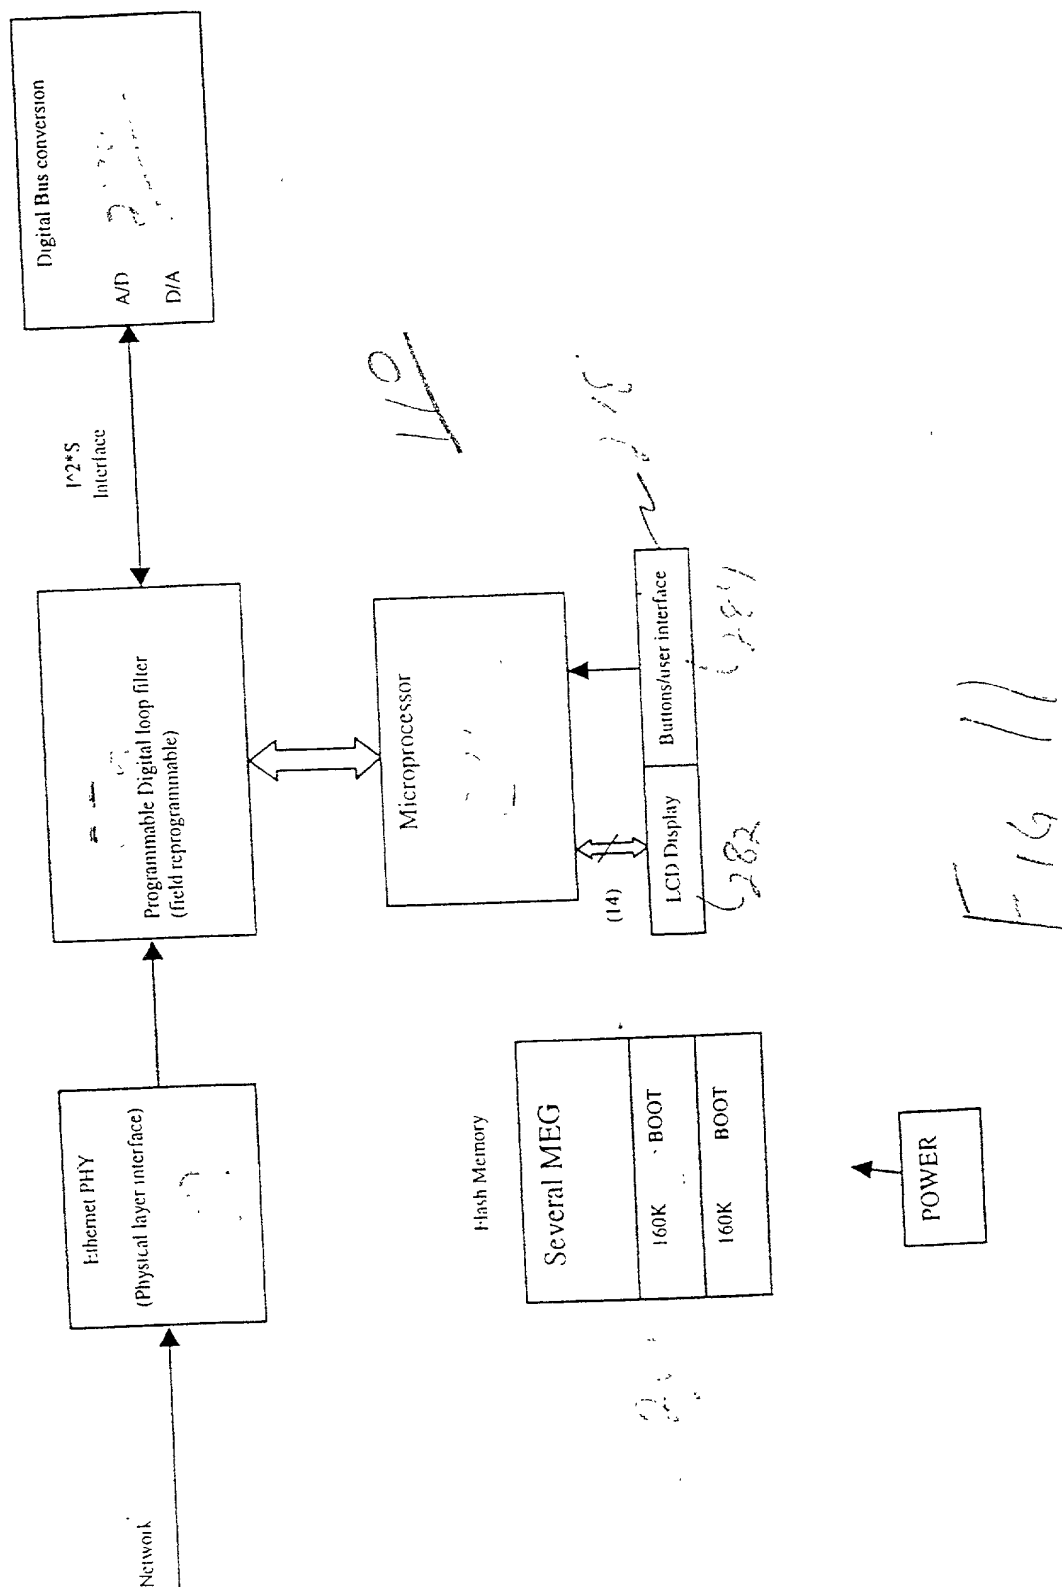


FIG. 11

03243694-050404

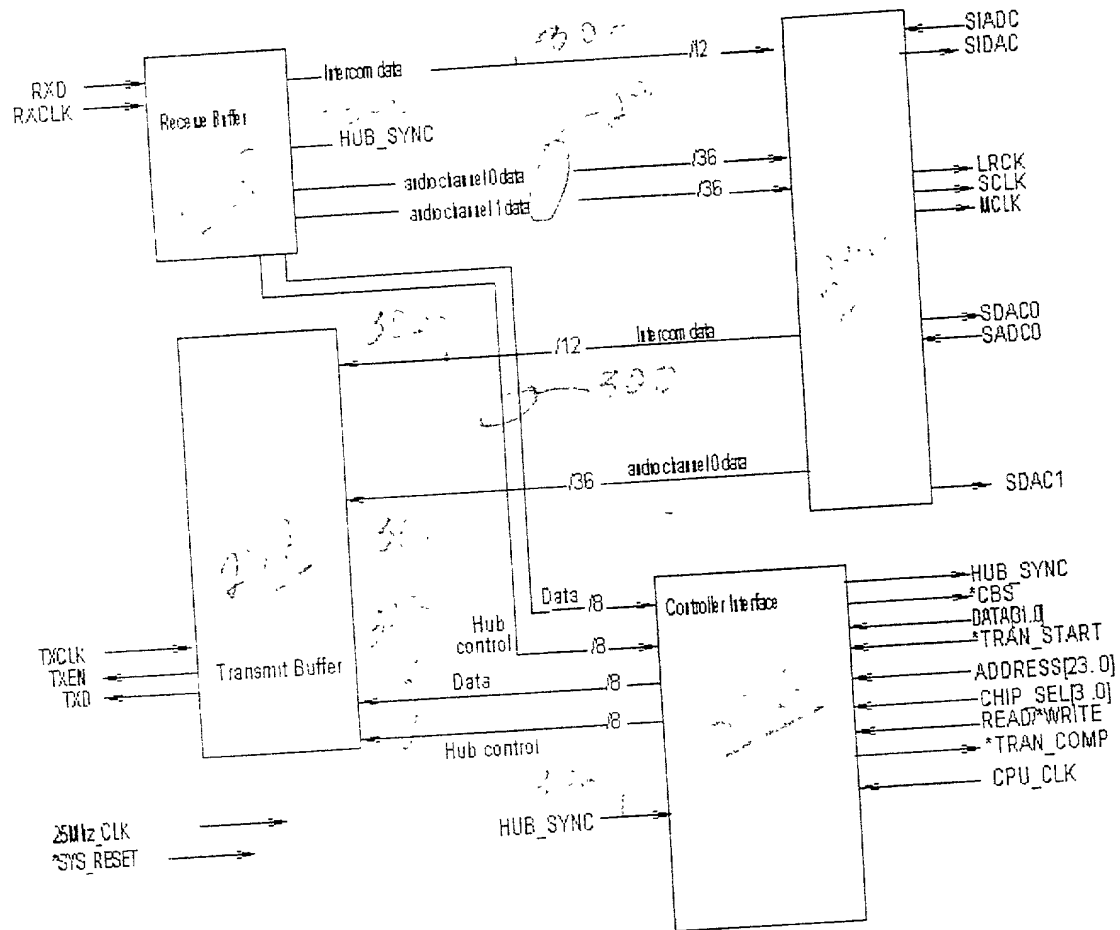


Fig. 10